

Solenoid Coil



Ordering Code

BSC - 24Vdc - 4981

BSC - 200, 300, 400 series Solenoid Valve Coil
SSC - 100 series Solenoid Valve Coil
24Vdc - 12Vdc; 24Vdc; 100Vdc;
 - 110Vac; 220Vac

LD - Lead wire



DIN - See DIN specifications
Blank - Solenoid coil only

When ordering of Explosion proof solenoid coil, voltage and area of application must be specified according to class ex. Zone 0, zone 1.....


For Solenoid coil with higher working temperature per request basis specified the working temperature.

Solenoid Coil 200, 300 & 400 series Solenoid Valve

Solenoid Coil 100 series Solenoid Valve

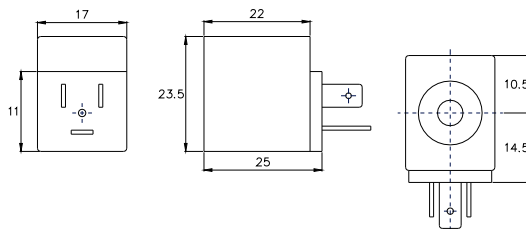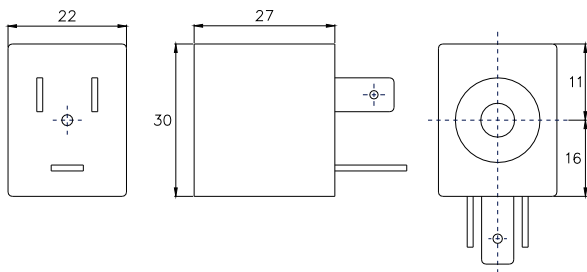

DIN Plug

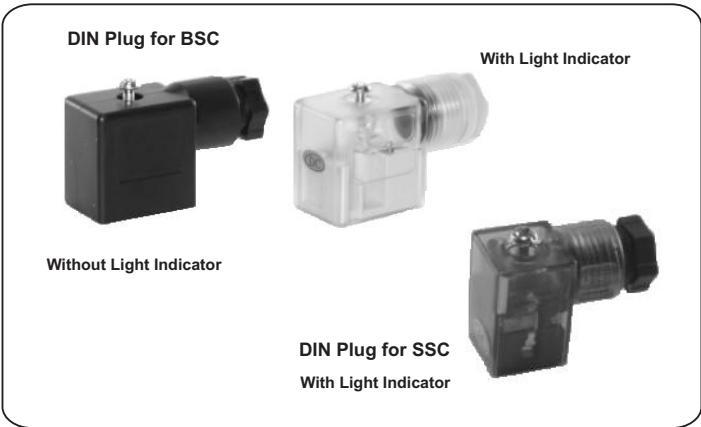

Ordering Code



DIN - **LED** - **DC**

DIN - Socket Plug for BSC
DINS - Socket Plug for SSC

LED - with Light Indicator
Blank - without Light Indicator

DC - For DC Solenoid Coil
AC - For AC Solenoid Coil

DIN-LED-AC voltage ranges from 5 to 220Vac
 DIN-LED-DC voltage ranges 10 to 110Vdc

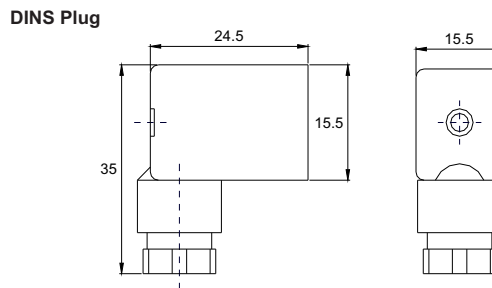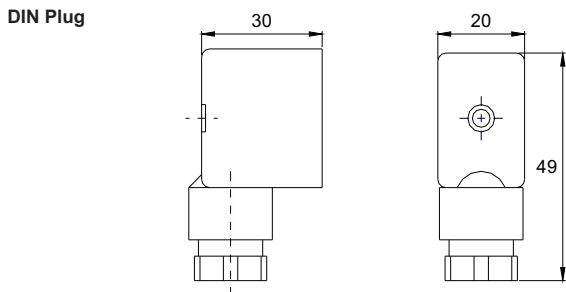

Dimensions are in mm